

900A , 25 kV & 35 kV Class Grounded Standoff Bushing



APPLICATION

The Chardon 900A 15/25 kV & 35 kV Grounded Standoff Bushings comply with the latest IEEE/ANSI 386 standard. These robust epoxy-molded bushings feature a single deadbreak interface and are ideal for grounding in pad-mount cabinets, underground vaults, and other equipment. Designed for secure installation on a parking stand bracket, each unit includes a 60" (1.52 m) 2/0 flexible copper grounding cable for a visible, submersible, and fully shielded ground connection. A stainless steel eyebolt allows for hotstick-compatible mounting and easy ground verification.

CURRENT RATINGS

Tests conducted in accordance with IEEE/ANSI Standard 386:

Current Tests	Amperes
Short Time	40,000 A rms symmetrical for 0.17s

Tests conducted in accordance with Chardon manufacturing process requirements:

- / Physical Inspection
- / Periodic Dissection
- / Periodic X-ray Analysis

ORDERING INFORMATION

Each kit Contains:

- / Grounded Standoff Bushing with Bracket
- / Shipping Cap
- / Silicone Grease
- / Installation Instruction Sheet

Deadbreak Grounded Standoff Bushing

Part Number	Description	No Stud	With Stud
25-GB900	Grounded Standoff Bushing w/ Copper Conductor	25-GB900	25-SOB900S
35-GB900	Grounded Standoff Bushing w/ Copper Conductor	35-GB900	35-SOB900S

PRODUCT CHARACTERISTICS

/ GROUND CABLE

60" (1.52 m) 2/0 flexible, all weather 600 A copper cable, provides proper grounding.

STANDARD 5/8"- 11 UNC 2B THREADS

/ Meets IEEE Standard 386-2009 specification for 600A products.

/ EYEBOLT

Stainless steel eyebolt rigidly secures standoff bushing to parking stand.


/ BRACKET

Stainless steel bracket with drain wire lug for bracket and shield grounding.


/ EPOXY INSULATION

High quality epoxy insulation ensures excellent thermal, electrical and mechanical reliability.

TECHNICAL DRAWINGS

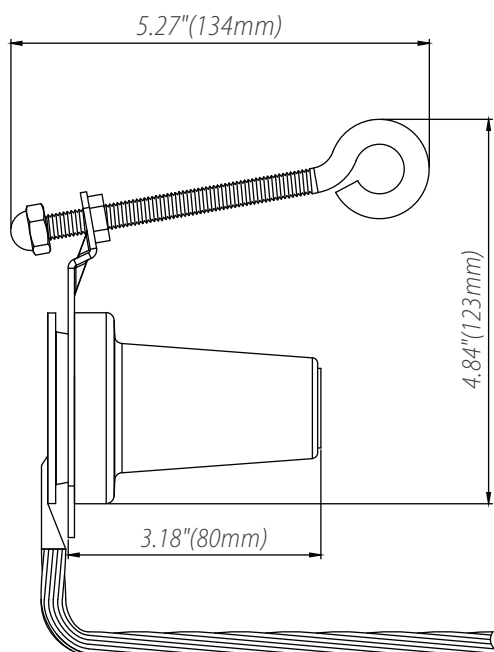

25-GB900

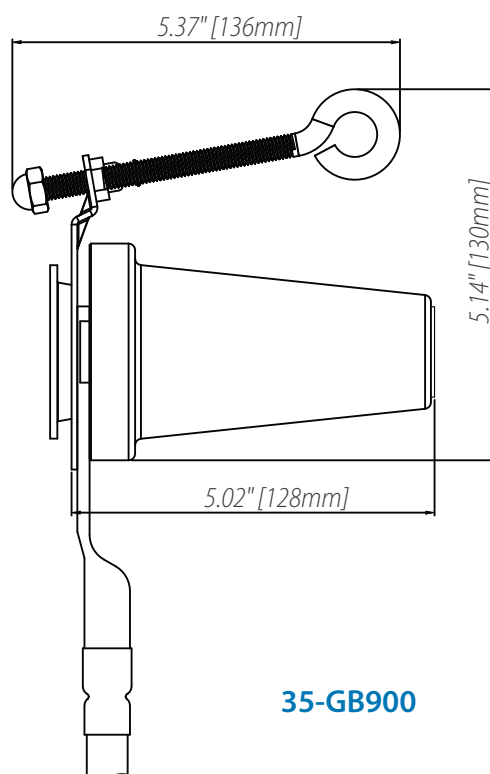

35-GB900



CHARDON TAIWAN CORPORATION

No.37 Min-Chie Road, Tung Lo
Industrial Park, Miao Li, Taiwan 366

Tel : +886-37-984385

Fax : +886-37-984770

www.chardongroup.com • info@chardongroup.com