

**200A, 28 kV  
Deadbreak Splice**



## APPLICATION

The Chardon 28 kV 200A Deadbreak Splice provides a fully shielded, submersible and separable cable connection. The Deadbreak Splice provides a convenient method for connecting, looping and tapping 200A deadbreak elbows and other accessories at locations where space, cable organization, flexibility and operability are important. Its design incorporates a lightweight, damage resistant EPDM rubber developed in-house. The Chardon Deadbreak Splice fully meets the requirements of ANSI/IEEE Stanard 386, and is available at a voltage class of 28 kV.

## PRODUCTION TESTS

Tests conducted in accordance with IEEE/ANSI Standard 386.

- / Minimum Corona Voltage Level –21.5 kV
- / AC 1 Minute Withstand – 45 kV

Tests conducted in accordance with Chardon manufacturing process requirements:

- / Physical Inspection
- / Periodic Dissection
- / Periodic X-ray Analysis


## VOLTAGE RATINGS

Voltage Class	28 kV
Max. Rating Phase to Ground	16.2 kV
AC 1 Minute Withstand	45 kV
BIL and Full Wave Crest	125 kV
Minimum Corona Voltage Level	21.5

## CURRENT RATINGS

Description	Test Parameters
Continuous	200 amps rms
Short Time	<ul style="list-style-type: none"><li>• 10,000 amps rms symmetrical for 0.17 s</li><li>• 3,500 amps rms symmetrical for 3.0 s</li></ul>

# DETAILED COMPOSITION OF THE CHARDON DEADBREAK SPLICE

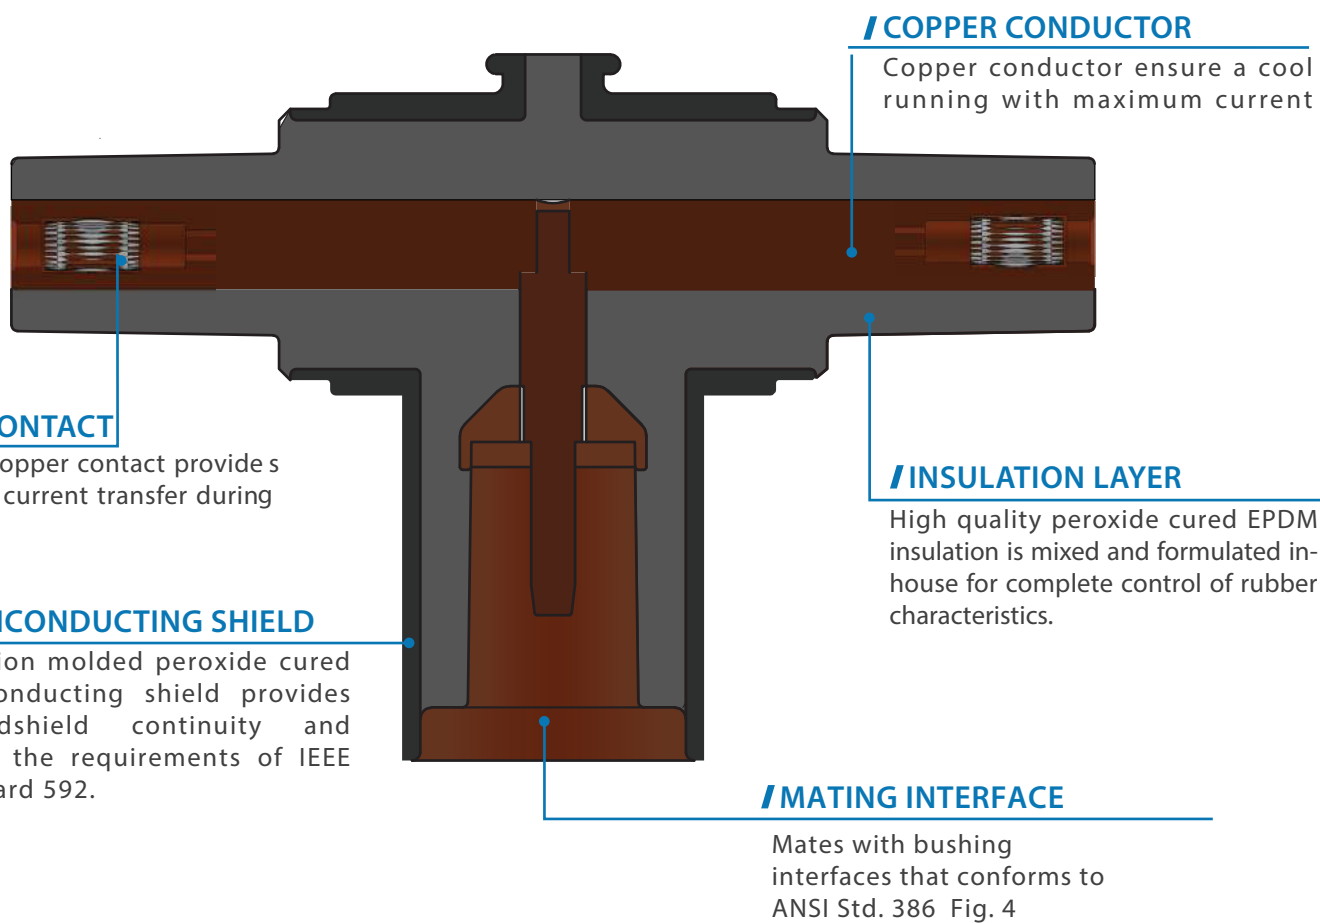

## ORDERING INFORMATION

Item	Ordering Code
Deadbreak Splice 2-way (Male Interface)	28-DJ200-S2
Deadbreak Splice 3-way (Two Male + One Female)	28-DJ200-T2
Deadbreak Splice 3-way (Three Male Interfaces)	28-DJ200-T3





28-DJ200-T2



28-DJ200-T3



28-DJ200-S2

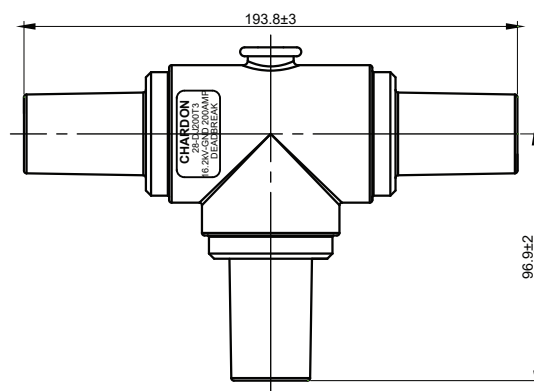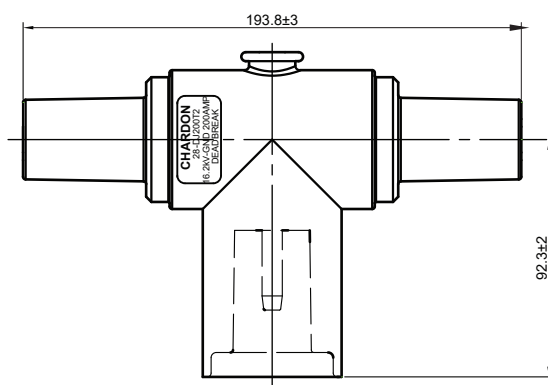



**CHARDON** TAIWAN CORPORATION

No.37 Min-Chie Road, Tung Lo  
Industrial Park, Miao Li, Taiwan 366

Tel : +886-37-984385

Fax : +886-37-984770

[www.chardongroup.com](http://www.chardongroup.com) • [info@chardongroup.com](mailto:info@chardongroup.com)