

Chardon IEC 25kV 200A Insulated Protective Cap



APPLICATION

The Chardon 25kV 200A Insulated Protective Cap can be used for temporary or permanent applications and provides a submersible, fully shielded insulated cap for energized bushings. When installed on a IEEE bushing interface or junctions, it is properly grounded using the attached drain wire, and providing physically seal and electrically insulate bushing interfaces.

The Chardon insulated cap design incorporates peroxide cured, EPDM insulation rubber, and a semi-conducting insert and outer shield. The outer conductive shield maintains ground potential on the cap's surface when a grounding wire is connected to a common ground.

KEY FEATURES

- / Provides a fully shielded and submersible connection when mated with the proper bushings.
- / 100% electrical tested at factory.
- / Mounting can be vertical, horizontal, or any angle in between.
- / No minimum phase clearance requirements.
- / IEEE/ANSI Standard 386.

PRODUCTION TESTS

Tests conducted in accordance with IEEE/ANSI Standard 386.

- / Partial Discharge – 19 kV≤5pC
- / AC 1 Minute Withstand – 40kV

Tests conducted in accordance with Chardon manufacturing process requirements:

- / Physical Inspection
- / Periodic Dissection
- / Periodic X-ray Analysis

VOLTAGE RATINGS

Max. Rating Phase to Ground	25 kV
AC 60Hz 1 Minute Withstand	40 kV
Partial Discharge	19 kV≤5pC
BIL and Full Wave Crest	125 kV

Each kit includes the following:

- / Insulated Cap
- / Silicone Grease
- / Installation Instruction Sheet
- / Bail Assembly

DETAILED COMPOSITION OF THE CHARDON 25KV INSULATED CAP

/ DRAIN WIRE TAB

Drain wire tabs provide a convenient point to connect a drain wire to ensure grounding of the connector shield. A drain wire is included with the product.

/ SEMICONDUCTING INSERT

Precision molded peroxide cured semiconducting insert provides corona-free electrostatic shielding of the connector.

/ PROBE

Brass probe provide esreliable conductive path with mating female contacts.

/ PULLING EYE




Stainless steel pulling eye for hotstick operations.

/ SEMICONDUCTING SHIELD

Precision molded peroxide cured semiconducting shield provides ground shield continuity.

/ INSULATION LAYER

High quality peroxide cured EPDM insulation is mixed and formulated in-house for complete control of rubber characteristics.

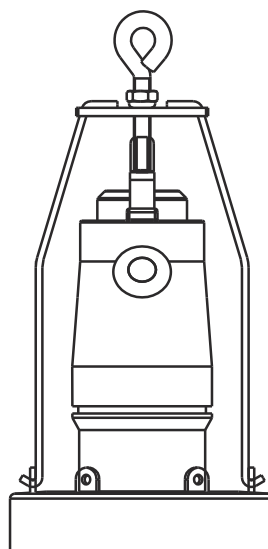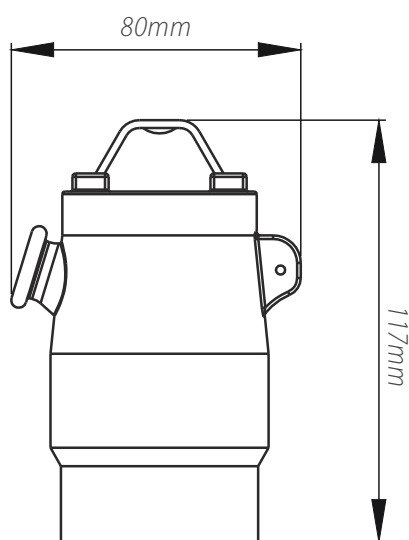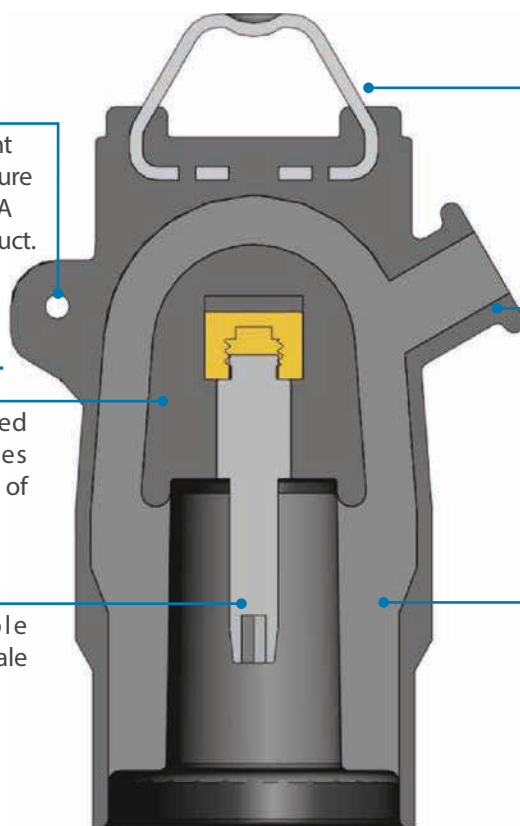

ORDERING INFORMATION

25 kV, 200A Insulated Protective Cap

25-DIC200



ANHUI CHARDON ELECTRIC LTD.

No.808 Taiji Road Economic Develop Zone of Guangde
County Anhui China

Tel: 0563-2216688

Fax: 0563-2251806

CHARDON TAIWAN CORPORATION

No.37 Min-Chie Road, Tung Lo Industrial Park, Miao Li,
Taiwan 366

Tel: +886-37-984385

Fax: +886-37-984770

SHANGHAI CHARDON ELECTRIC LTD.

Room 1202, office building No.399, Yun Gu Road ,
Jiading district, Shanghai, China 201801

Tel: +86-21-39105900

Fax: +86-21-391059166

www.chardongroup.com info@chardongroup.com