

200A, 35 kV Class Loadbreak Protective (Insulating) Cap



APPLICATION

The Chardon Protective Cap is an accessory product to other 35 kV, 200A products with loadbreak interfaces (bushing inserts, loadbreak junctions, feed thru inserts, etc.). It is designed to physically seal and electrically insulate loadbreak bushing interfaces. When installed on a loadbreak bushing interface, and

properly grounded using the attached drain wire, the Loadbreak Protective Cap provides a submersible, fully shielded insulated cap for energized bushings.

The Loadbreak Protective Cap can be used for temporary or permanent applications.

PRODUCTION TESTS

- Tests conducted in accordance with IEEE/ANSI Standard 386.
- / Partial Discharge – 26 kV≤5pC
 - / AC 1 Minute Withstand – 50 kV

- Tests conducted in accordance with Chardon manufacturing process requirements:
- / Physical Inspection
 - / Periodic Dissection
 - / Periodic X-ray Analysis

VOLTAGE RATINGS

| | |
|-----------------------------|-----------|
| Voltage Class | 35 kV |
| Max. Rating Phase to Phase | 36.6 kV |
| Max. Rating Phase to Ground | 21.1 kV |
| AC 1 Minute Withstand | 50 kV |
| DC 15 Minute Withstand | 103 kV |
| BIL and Full Wave Crest | 150 kV |
| Partial Discharge | 26 kV≤5pC |

• 35LIC200-121825-REV02

DETAILED COMPOSITION OF THE CHARDON LOADBREAK PROTECTIVE CAP

/ PULLING EYE

Molded in stainless steel pulling eye insures high strength for hotstick operation.

/ SEMICONDUCTING INSERT

Precision molded peroxide cured semiconducting insert provides corona-free electrostatic shielding of the connector.

/ LATCHING RING

Semiconducting molded locking ring secures cap on nose piece of mating product.

/ INSULATION LAYER

High quality peroxide cured EPDM Insulation is mixed and formulated in-house for complete control of rubber characteristics.

/ DRAIN WIRE TAB



Drain wire tab provides a convenient point to connect drain wire to ensure grounding of the connector shield. A drain wire is included with the product.

/ SEMICONDUCTING SHIELD

Precision molded peroxide cured conducting shield provides ground shield continuity.

/ PROBE

Brass probe provides reliable conductive path with mating female contacts.

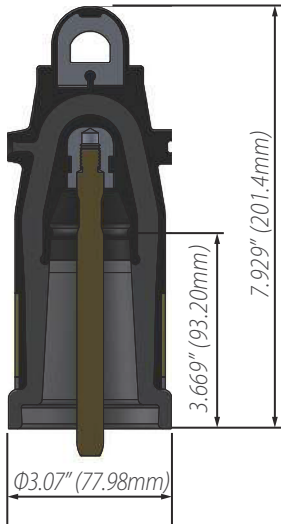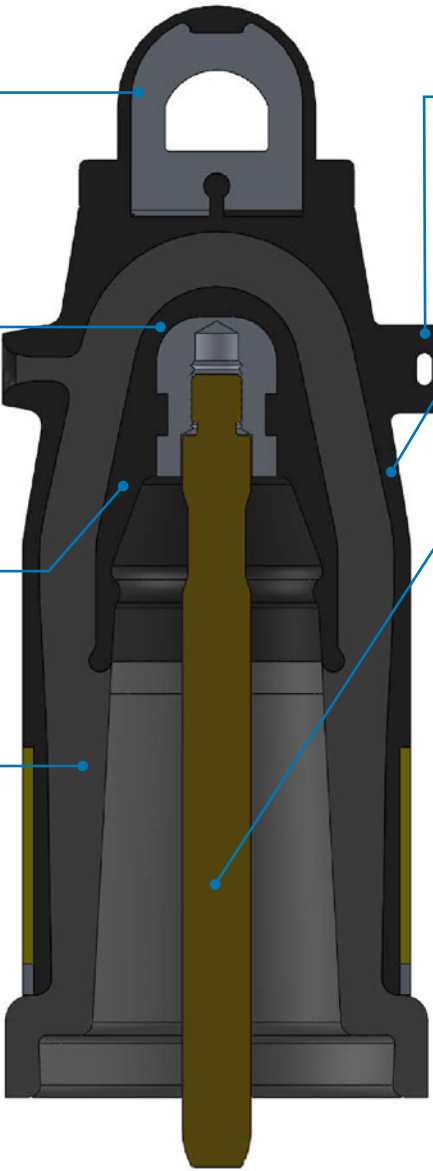

ORDERING INFORMATION

| | |
|--------------------------------------|-----------|
| 35 kV, 200A Loadbreak Protective Cap | 35-LIC200 |
|--------------------------------------|-----------|



ANHUI CHARDON ELECTRIC LTD.

No.808 Taiji Road Economic Develop Zone of Guangde
County Anhui China

Tel: 0563-2216688

Fax: 0563-2251806

CHARDON TAIWAN CORPORATION

No.37 Min-Chie Road, Tung Lo Industrial Park, Miao Li,
Taiwan 366

Tel: +886-37-984385

Fax: +886-37-984770

SHANGHAI CHARDON ELECTRIC LTD.

Room 1202, office building No.399, Yun Gu Road ,
Jiading district, Shanghai, China 201801

Tel: +86-21-39105900

Fax: +86-21-391059166

www.chardongroup.com info@chardongroup.com