



200A, 35 kV Class Loadbreak Portable Feed Thru



APPLICATION

The Chardon 200A, 35kV Class Loadbreak Portable Feed Thru is designed to be installed on a parking stand, attached to a transformer or other apparatus. Two bushing insert loadbreak interfaces can be mated with an elbow arrester, a loadbreak elbow, or an insulated cap. When mated with other products that meets IEEE Standard 386, the portable feed thru provides a fully shielded, submersible connection for loadbreak operation.

The Chardon Portable Feed Thru meets all the requirements of IEEE Standard 386, and is fully interhcangeable with competetior's products and mating products that also meet IEEE Standard 386. The indicating ring design eliminates the guesswork of loadbreak installation, it provides feedback to determine if the elbow is properly installed.

PRODUCTION TESTS

Tests conducted in accordance with IEEE/ANSI Standard 386.

- / Partial Discharge 26 kV≤5pC
- / AC 1 Minute Withstand 50 kV

Tests conducted in accordance with Chardon manufacturing process requirements:

- / Physical Inspection
- Periodic Dissection
- Periodic X-ray Analysis

VOLTAGE RATINGS


Voltage Class	35 kV
Max. Rating Phase to Phase	36.6 kV
Max. Rating Phase to Ground	21.1 kV
AC 1 Minute Withstand	50 kV
DC 15 Minute Withstand	103 kV
BIL and Full Wave Crest	150 kV
Partial Discharge	26 kV≤5pC

^{· 35}LPFT200-121825-REV01

CURRENT RATINGS

Description	Test Parameters	
Continuous	200 amps rms	
Switching	10 operations at 200 amps rms at 36.3 kV	
Fault Close	10,000 amps rms symmetrical at 36.6 kV for 0.17 s after 10 consecutive successful switching operations	
Short Time	• 10,000 amps rms symmetrical for 0.17 s • 3,500 amps rms symmetrical for 3.0 s	

DETAILED COMPOSITION OF THE CHARDON LOADBREAK PORTABLE FEED THRU



/ STOP RING


Limit piston and finger contact travel during fault close.

/ CONTACT

Copper component transfers current from piston contact to another surface.

I COPPER BUS BAR

Provide consistent current carry capability during operation.

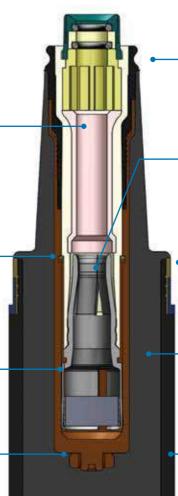

/ LOCKING GROOVE

Locking groove assures propera installation by "locking" into elbow.

/ FINGER CONTACT

Tin plated copper contact provides a consistent current transfer during switching and fault close operations.

/ INDICATOR RING

Bright yellow ring provides close indication and assures a quality connection.

/ INSULATION LAYER

High quality peroxide cured EPDM insulation is mixed and formulated inhouse for complete control of rubber resistance.

I CONDUCTING SHIELD

Precision molded peroxide cured conducting shield provides ground shield continuity.

ORDERING INFORMATION


Each Portable Feed Thru kit includes the following:

- / Portable Feed Thru
- Shipping Cap (not for energized operation)
- Stainless Steel Bail Assembly
- Installation Instruction Sheet

To order the 35kV Class Portable Feed Thru Kit, use the P/N below:

35kV Loadbreak Portable Feed Thru

35-LPFT200

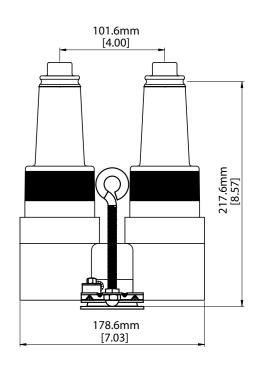



ANHUI CHARDON ELECTRIC LTD.

No.808 Taiji Road Economic Develop Zone of Guangde County Anhui China

Tel: 0563-2216688 Fax: 0563-2251806

CHARDON TAIWAN CORPORATION

No.37 Min-Chie Road, Tung Lo Industrial Park, Miao Li, Taiwan 366

Tel:+886-37-984385 Fax:+886-37-984770

SHANGHAI CHARDON ELECTRICE LTD.

Room 1202, office building No.399, Yun Gu Road , Jiading district, Shanghai, China 201801

Tel: +86-21-39105900 Fax: +86-21-391059166

www.chardongroup.com/info@chardongroup.com