



25-BE600/900
35-BE600/900

Chardon 25kV & 35 kV 600/900A Bushing Extender



APPLICATION

The Chardon 25/35 kV 600/900A bushing Extender allows for coupling reducing tap plugs, connecting plugs and apparatus bushings. When assembled to mating apparatus, it provides a completely submersible, fully shielded and insulated connection for deadbreak applications that meet the requirements of IEEE Std 386™ standard.

KEY FEATURES

- Provides a fully shielded and submersible connection.
- No minimum phase clearance requirements.

PRODUCTION TESTS

Tests conducted in accordance with IEEE 386:

- Partial Discharge
- AC Withstand
- Impulse Withstand



Tests conducted in accordance with Chardon manufacturing process requirements:

- Physical Inspection
- Periodic Dissection
- Periodic X-ray Analysis

PRODUCT RATINGS

Voltage Ratings	25 kV	35 kV	Current Ratings	600 A	900 A
Voltage Class, Phase-to-Phase Max.	25 kV	35 kV	Continuous	600 A rms	900 A rms
Op. Voltage – (phase-to-ground)	15.2 kV	21.1 kV	4 Hours Overload	900 A rms	1200 A rms
Partial Discharge	19 kV≤5pC	26 kV≤5pC	Continuous	25,000 rms symmetrical for 0.17 s	40,000 rms symmetrical for 0.17 s
AC Withstand (1 minute)	40 kV	50 kV		10,000 rms symmetrical for 3.00 s	10,000 rms symmetrical for 3.00 s
Impulse-Withstand Voltage (BIL)	125 kV	200 kV			


DETAILED COMPOSITION OF THE CHARDON 25KV 600/900A BUSHING EXTENDER

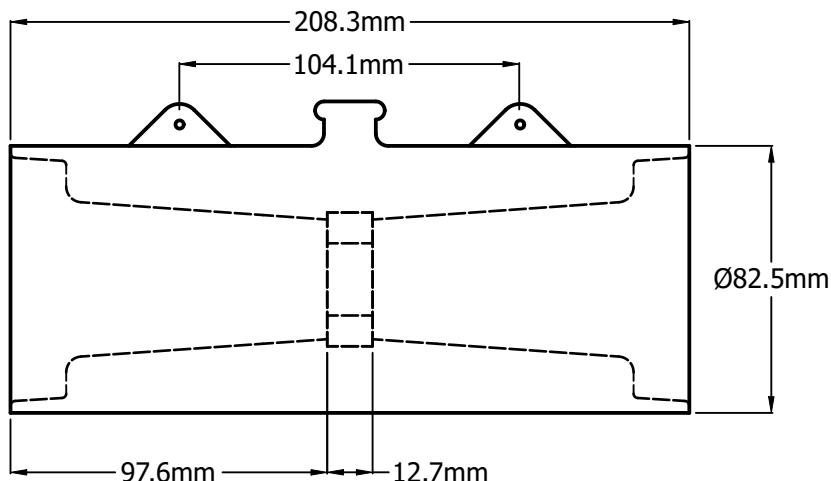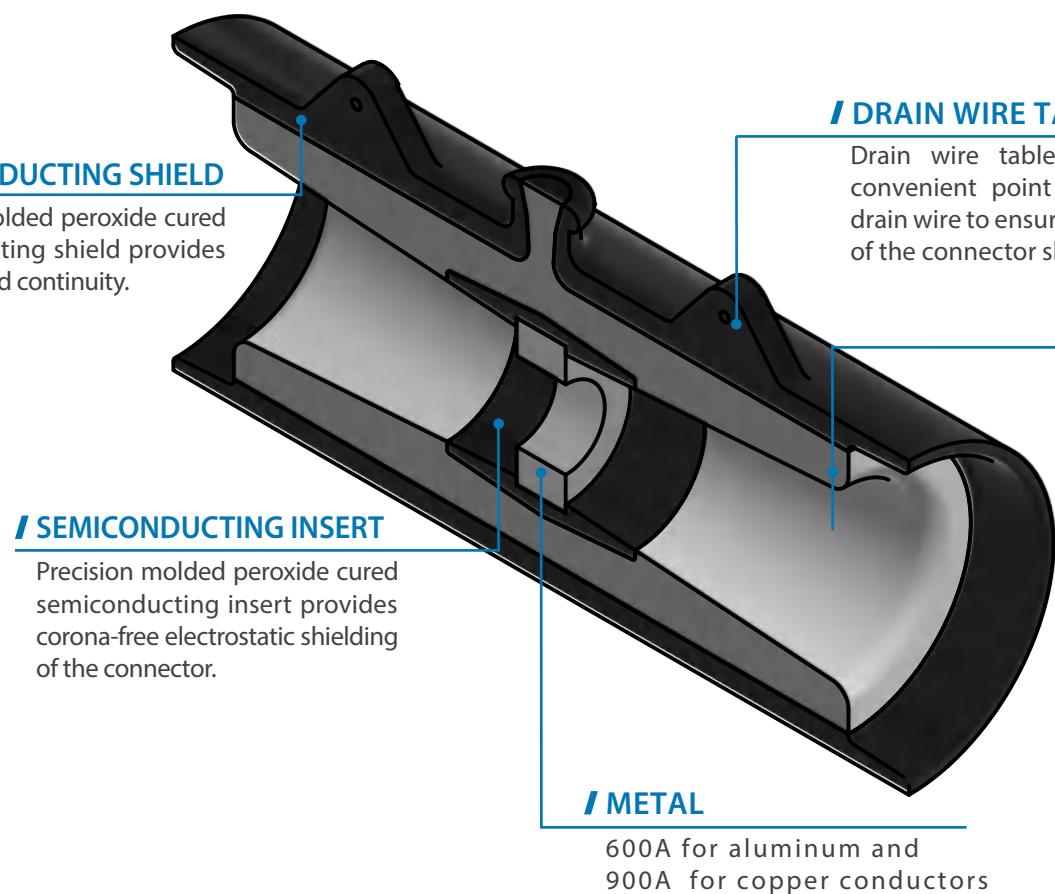

ORDERING INFORMATION

25 kV 600A Bushing Extender	25-BE600
25 kV 900A Bushing Extender	25-BE900

DETAILED COMPOSITION OF THE CHARDON 35kV 600/900A BUSHING EXTENDER

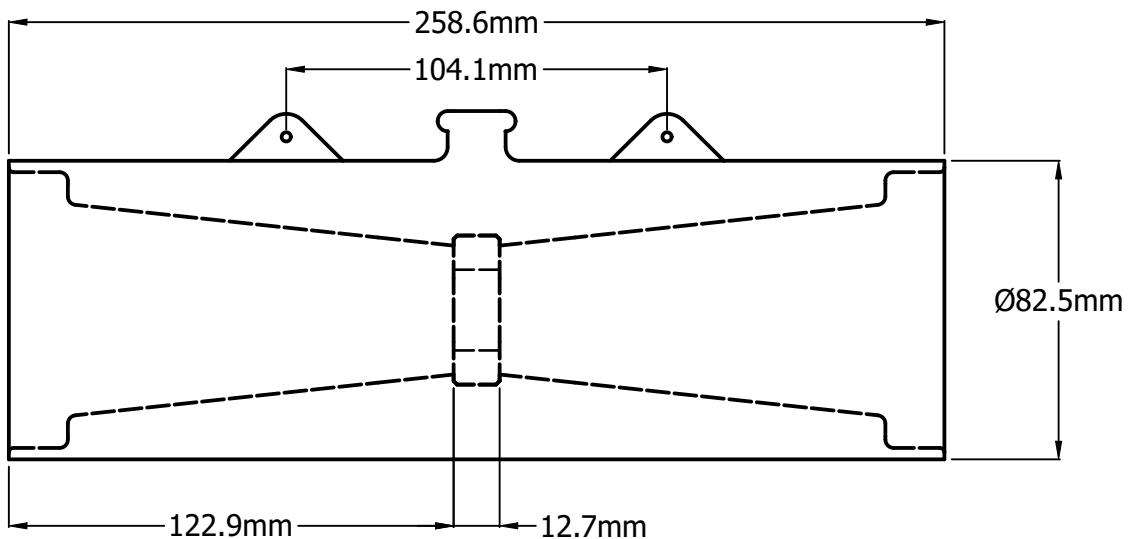

ORDERING INFORMATION

35 kV 600A Bushing Extender	35-BE600
35 kV 900A Bushing Extender	35-BE900



CHARDON TAIWAN CORPORATION

No.37 Min-Chie Road, Tung Lo
Industrial Park, Miao Li, Taiwan 366

Tel : +886-37-984385

Fax : +886-37-984770

www.chardongroup.com • info@chardongroup.com