

Chardon 25kV & 35 kV 600/900A Bushings Extender



APPLICATION

The Chardon 25/35 kV 600/900A bushing Extender allows for coupling reducing tap plugs, connecting plugs and apparatus bushings. When assembled to mating apparatus, it provides a completely submersible, fully shielded and insulated connection for deadbreak applications that meet the requirements of IEEE Std 386™ standard.

KEY FEATURES

- / Provides a fully shielded and submersible connection.
- / No minimum phase clearance requirements.

PRODUCTION TESTS

Tests conducted in accordance with IEEE 386:

- / Partial Discharge
- / AC Withstand
- / Impulse Withstand



Tests conducted in accordance with Chardon manufacturing process requirements:

- / Physical Inspection
- / Periodic Dissection
- / Periodic X-ray Analysis

PRODUCT RATINGS

Voltage Ratings	25 kV	35 kV	Current Ratings	600 A	900 A
Voltage Class, Phase-to-Phase Max.	25 kV	35 kV	Continuous	600 A rms	900 A rms
Op. Voltage – (phase-to-ground)	15.2 kV	21.1 kV	4 Hours Overload	900 A rms	1200 A rms
Partial Discharge	19 kV≤5pC	26 kV≤5pC	Continuous	25,000 rms symmetrical for 0.17 s	40,000 rms symmetrical for 0.17 s
AC Withstand (1 minute)	40 kV	50 kV		10,000 rms symmetrical for 3.00 s	10,000 rms symmetrical for 3.00 s
Impulse-Withstand Voltage (BIL)	125 kV	200 kV			

DETAILED COMPOSITION OF THE CHARDON 25KV 600/900A BUSHING EXTENDER

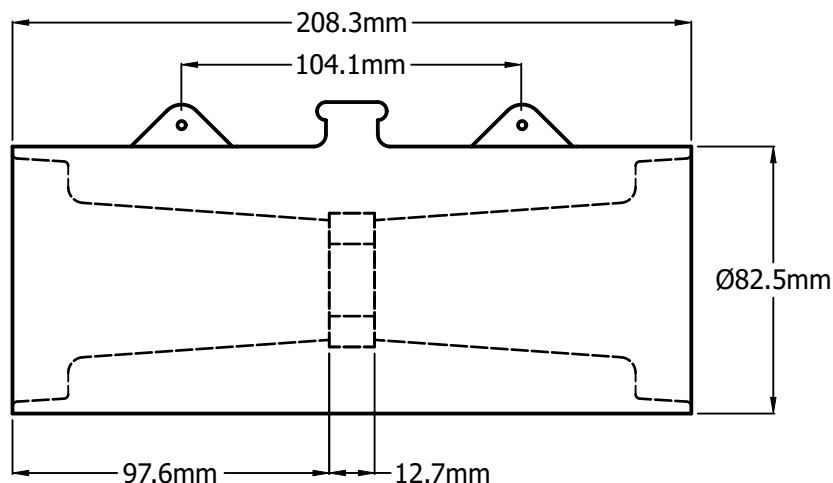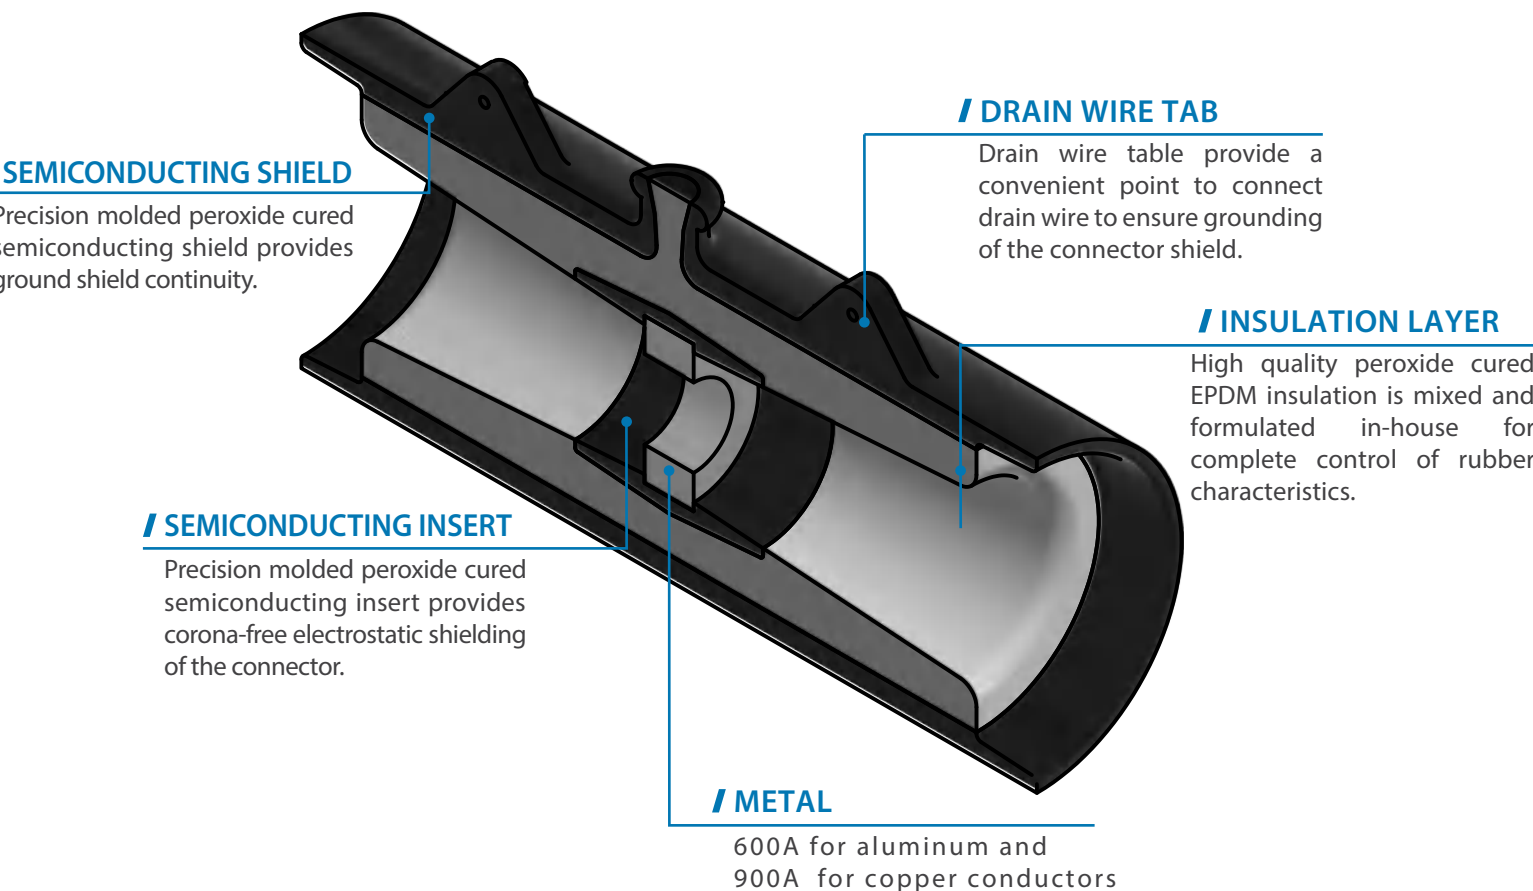

ORDERING INFORMATION

25 kV 600A Bushing Extender	25-BE600
25 kV 900A Bushing Extender	25-BE900
25 kV 600A Bushing Extender with stud	25-BE600-AL
25 kV 900A Bushing Extender with stud	25-BE900-CU

DETAILED COMPOSITION OF THE CHARDON 35kV 600/900A BUSHING EXTENDER

/ SEMICONDUCTING SHIELD

Precision molded peroxide cured semiconducting shield provides ground shield continuity.

/ DRAIN WIRE TAB

Drain wire tabs provide a convenient point to connect drain wire to ensure grounding of the connector shield.

/ INSULATION LAYER


High quality peroxide cured EPDM insulation is mixed and formulated in-house for complete control of rubber characteristics.

/ SEMICONDUCTING INSERT

Precision molded peroxide cured semiconducting insert provides corona-free electrostatic shielding of the connector.

/ METAL

600A for aluminum and
900 A for copper conductors

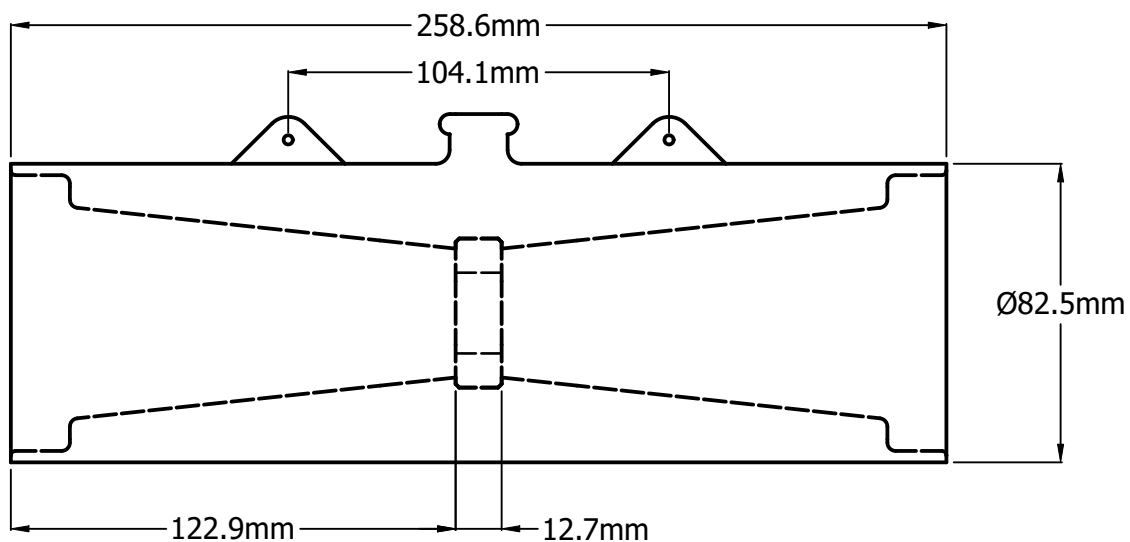

ORDERING INFORMATION

35 kV 600A Bushing Extender	35-BE600
35 kV 900A Bushing Extender	35-BE900
35 kV 600A Bushing Extender with stud	35-BE600-AL
35 kV 900A Bushing Extender with stud	35-BE900-CU



ANHUI CHARDON ELECTRIC LTD.

No.808 Taiji Road Economic Develop Zone of Guangde County
Anhui China
Tel: 0563-2216688
Fax: 0563-2251806

CHARDON TAIWAN CORPORATION

No.37 Min-Chie Road, Tung Lo Industrial Park, Miao Li, Taiwan 366
Tel:+886-37-984385
Fax:+886-37-984770

SHANGHAI CHARDON ELECTRIC LTD.

Room 1202, office building No.399, Yun Gu Road, Jiading district,
Shanghai, China 201801
Tel: +86-21-39105900
Fax: +86-21-39105916

www.chardongroup.com·info@chardongroup.com