

630A, 1250A, 72.5kV Class Interface F Equipment Bushing



APPLICATION

The Chardon 72 kV Interface F equipment bushing meets the full requirements of CENELEC EN 50181 and IEC 60137, provides a bolted interface made of quality epoxy. The part is

designed for use in equipment utilizing oil as insulating fluid, commonly used in transformers, switch gears and capacitors.

PRODUCTION TESTS

Tests conducted in accordance with IEC 60137

- / Partial Discharge- 72.5 kV
- / AC 1 Minute Withstand - 155 kV

Tests conducted in accordance with Chardon manufacturing process requirements:

- / Physical Inspection
- / Periodic Dissection
- / Periodic X-ray Analysis

VOLTAGE RATINGS


Voltage Class (U _m)	72.5kV
AC 1 Minute Withstand	155 kV
BIL and Full Wave Crest	325 kV
Partial Discharge	72.5 kV < 10 pC

CURRENT RATINGS

	72-DIB630	72-DIB1250
Continuous Current	630 A	1250 A


• Revision Date: 06.30.2026

ORDERING INFORMATION


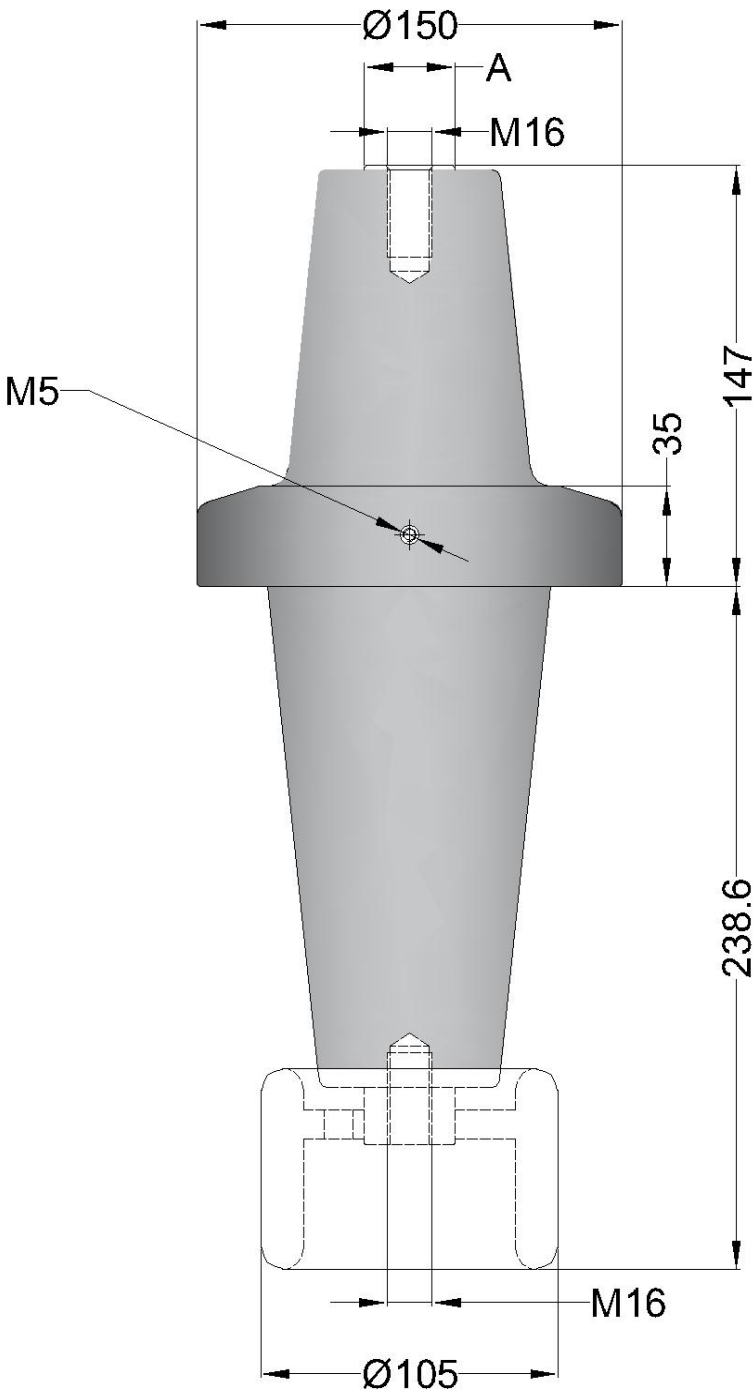


Chardon Part Number	Dimensions(A)
72-DIB630	Ø25
72-DIB1250	Ø32

ORDERING INFORMATION

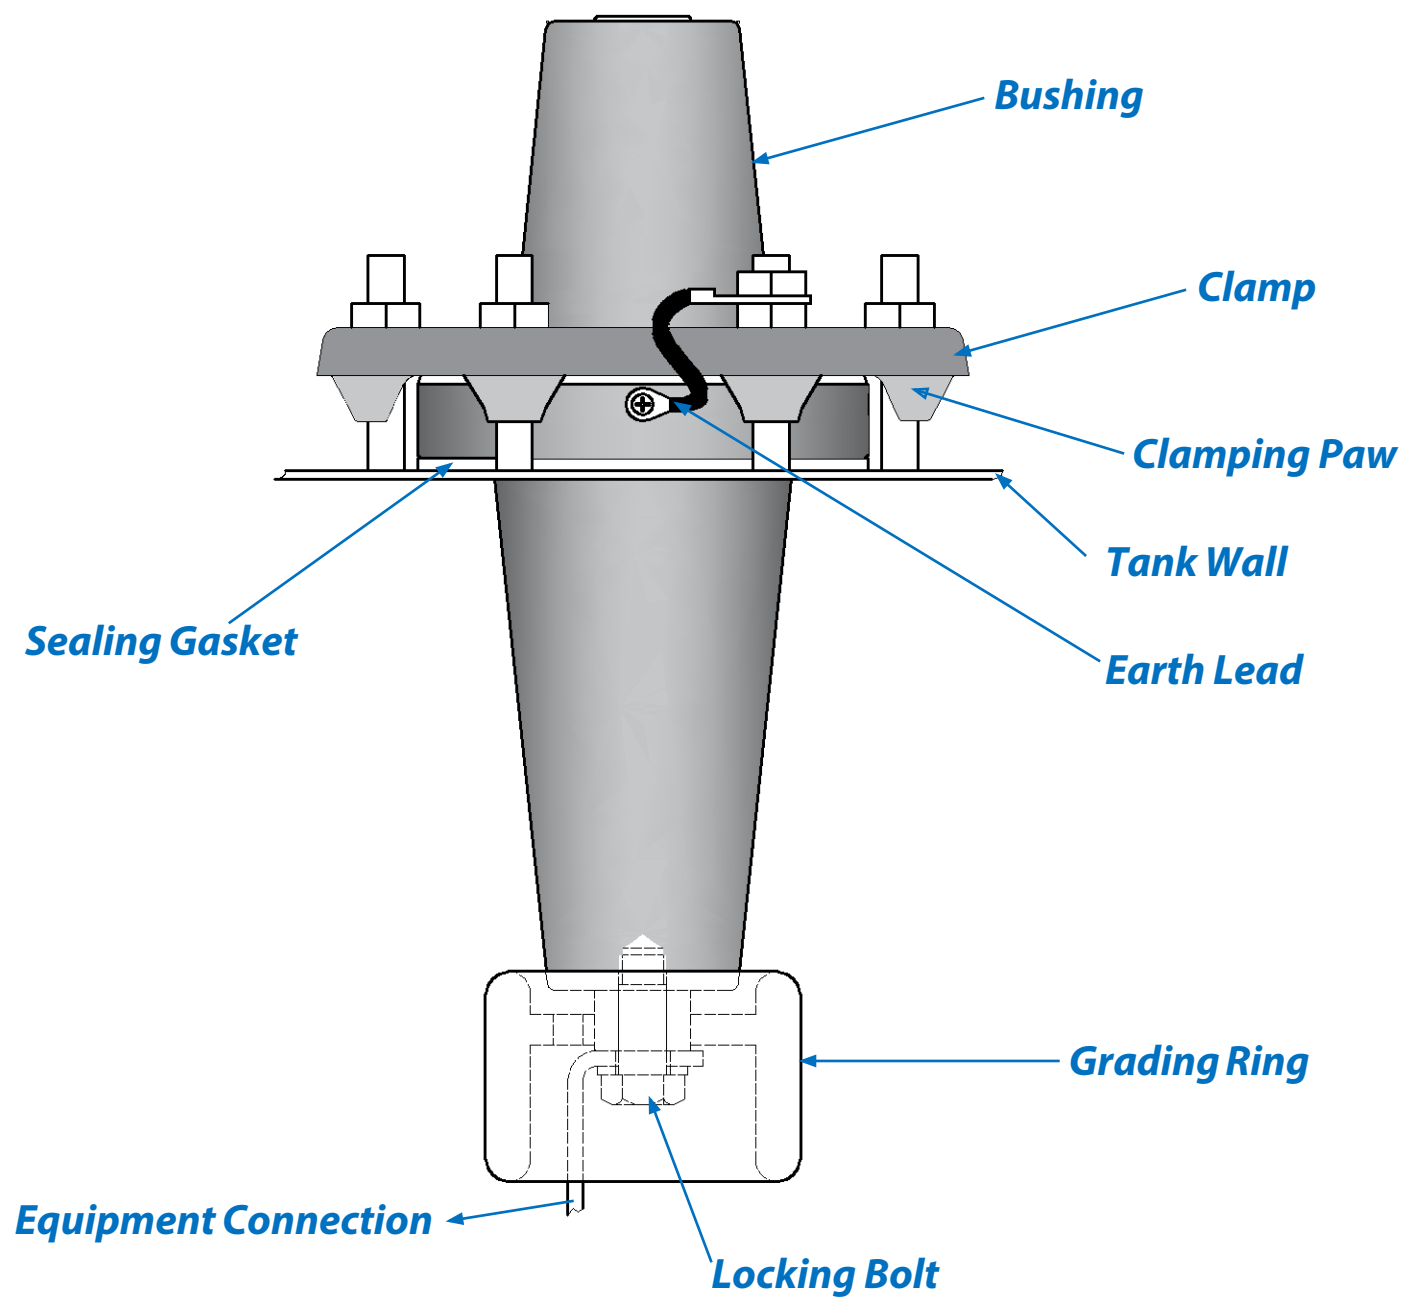

ORDERING INFORMATION

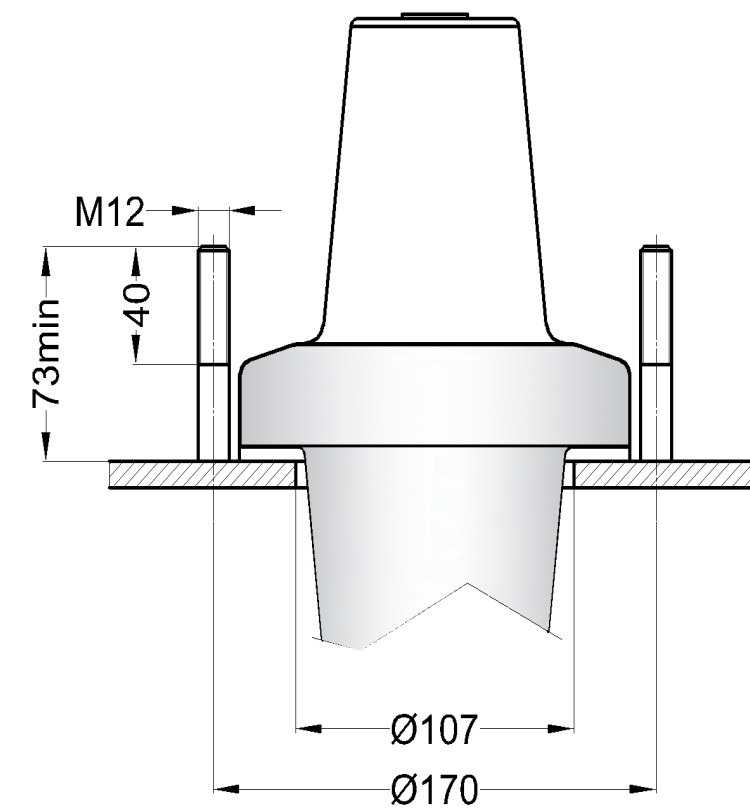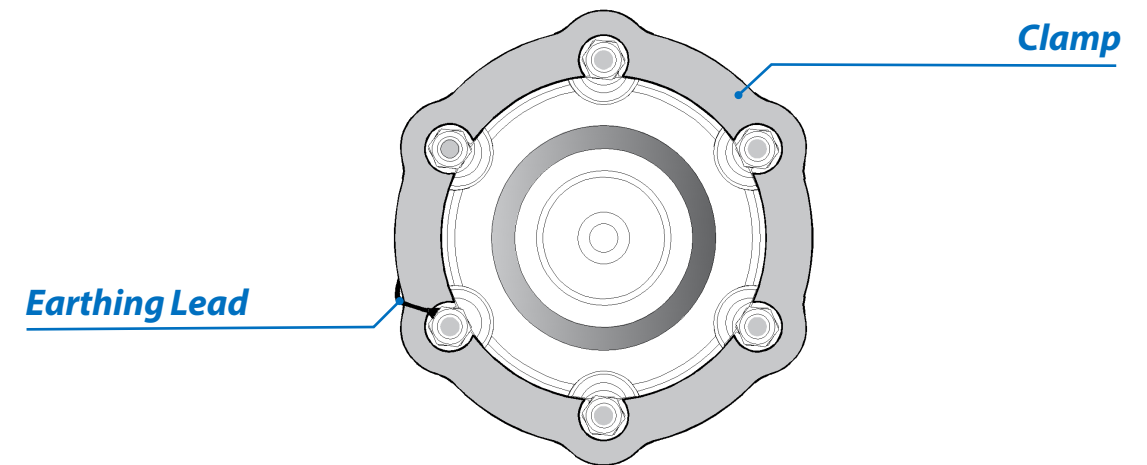



ANHUI CHARDON ELECTRIC LTD.

No.808 Taiji Road Economic Develop Zone of Guangde County
Anhui China
Tel: 0563-2216688
Fax: 0563-2251806

CHARDON TAIWAN CORPORATION

No.37 Min-Chie Road, Tung Lo Industrial Park, Miao Li, Taiwan 366
Tel:+886-37-984385
Fax:+886-37-984770

SHANGHAI CHARDON ELECTRIC LTD.

Room 1202, office building No.399, Yun Gu Road, Jiading district,
Shanghai, China 201801
Tel: +86-21-39105900
Fax: +86-21-39105916

www.chardongroup.com·info@chardongroup.com